

High-performance tape for coarse-backed textile skirtings

# Bullran 45

Secure adhesion of whipped carpet skirtings onto rough surfaces

## Product Properties / Benefits:

- ▶ High-performance adhesive for needlepunch, woven and fleece backings
- ▶ Quick and clean, permanently flexible
- ▶ Solvent-free, clean indoor air
- ▶ Easy to use with Contact applicator



## Applications:

### ▶ Suitable carpet skirting:

- with jute backing
- with synthetic double backs (SDR), including coarse
- with textile action backs (TR)
- with latex foam backs
- from needle punch
- from Kugelgarn
- from woven textile floor coverings

### ▶ Suitable walls:

- Breeze/plaster
- Brickwork
- Metal (untreated)
- Painted
- Synthetic material
- Wood
- Concrete
- Ceramics
- Plasterwork (primed)
- Wallpaper\*
- Filled (primed)

### ▶ Not guaranteed:

- Carpet skirting with PVC and PU backs
- Wooden strips
- Dirt trap runners
- PVC soft skirting boards
- Aluminium skirting
- Core skirting boards

\* see „Preparation“

for whipped carpet skirtings 50 – 60 mm  
ON surfaces with up to 3 mm deep texture

## Technical Data:

Special acrylic adhesive

Will not dry out or become brittle

Roll width 45 mm, roll length 25 m

Application temperature from + 15 °C

Temperature resistant from – 40 °C to + 140 °C (when installed)

Shelf-life min. 2 years in original packaging; store protected from direct sunlight

Do not place rolls on to the cut surfaces without adhesive-resistant paper washers inbetween

## Garantee:

UZIN provides a guarantee of 5 years on all the characteristics guaranteed in the fitting instructions.

- When laying the floor covering, take the generally accepted rules of the trade and technology and the respective, valid national EN standards into account

Claims under the guarantee will be excluded if:

- Unusual influences affect the product, in particular of a chemical or mechanical nature
- A utilisation or application has taken place that deviates from the installation instructions.

In all cases, some adhesion tests must be carried out on-site before carrying out the application.

## APPLICATION INSTRUCTIONS

### Preparation:

- ▶ Preparation of the sub-surface: The sub-surface must be permanently dry, hard, flat, able to be walked on and free of grease, dust and silicone, in accordance with the applicable, valid national standard EN.
- ▶ Wallpaper: must be firmly glued into place.
- ▶ Binding the dust: any dust must be consolidated with a solvent-free primer.

### What you need:

- ▶ Bullran 45, rubber hammer, carpet knife




1

- ▶ Fit the Bullran 45 onto the back of the whipped carpet skirting (by hand or fast and simple with the contact applicator)



2

- ▶ Pull off the protective paper continuously
- ▶ Fit the carpet skirting free from tension and strain

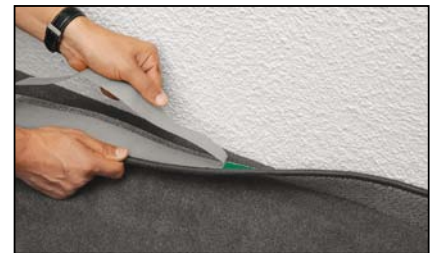

3

- ▶ Tap in everywhere using the rubber hammer



4

- ▶ Before removing the protective paper, pre-bend the carpet skirting at the internal/external corners (to relieve the tension in the skirting)



### Contact applicator:

